



# BASIC

## Standard equipment:

- Plug-in (internal compressor)
- Electronic temperature controller with display
- Dynamic cooling
- Automatic defrost
- Automatic condensate evaporation
- Automatic fan switch
- Exterior made of stainless steel - grinded finish
- Solid door
- Self-closing door
- Magnetic gasket
- Door-lock
- Adjustable legs
- Interior made of stainless steel - mirror finish
- Shelf guides
- Metal coated shelves

## Optional equipment:

- English socket
- Set of castors
- Shelves made of stainless steel
- Metal coated shelf
- Shelf guides
- Internal light

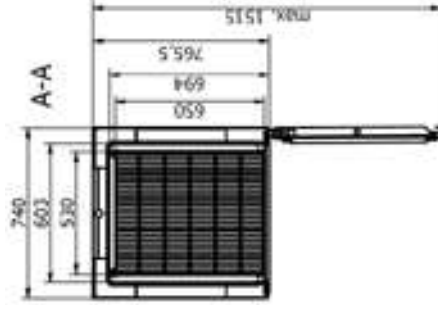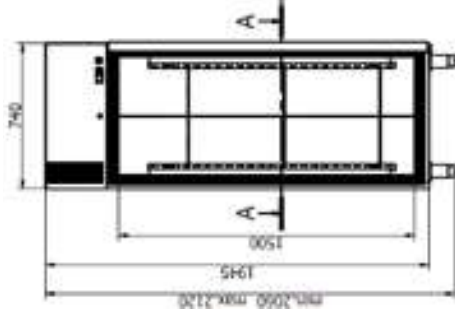

MODEL	TEMP. RANGE [°C]	AMBIENT CONDITIONS [°C/RH]	CAPACITY [l]	DIMENSIONS L x D x H [mm]	NUMBER OF DOORS	NUMBER OF SHELVES	SHELF DIMENSIONS [mm]	POWER SUPPLY [V/Hz]	ENERGY CONSUMPTION [kWh/24]	NET WEIGHT [kg]	INSULATION THICKNESS [mm]	REFRIGERANT
BASIC C700	+1...+10	+40/40%	626	740x830x2090	1	3	530x650	230 / 50	1.55	125	70	R-290
BASIC C1400	+1...+10	+40/40%	1252	1480x830x2090	2	6	530x650	230 / 50	2.52	180	70	R-290
BASIC F700	-18...+20	+40/40%	626	740x830x2090	1	3	530x650	230/50	4.4	130	70	R-290
BASIC F1400	-18...+20	+40/40%	1252	1480x830x2090	2	6	530x650	230/50	8.8	190	70	R-290