Ice Cream Freezer

IC510D

Dimensions and weight	
Product dimensions, HxWxD, mm	830 x 1510 x 694
Product depth w/handle, mm	694
Packaging dimensions, HxWxD, mm	890 x 1583 x 770
Gross volume, L	473
Net volume, L	373
Gross- / Net volume, L	473 / 373
Internal dimensions, HxWxD, mm	636 x 1365 x 550
Gross- / Net weight, kg	95 / 80

Performance and consumption	
Energy efficiency class	D
Daily Energy Consumption, kWh/24	2,11
Annual energy cons. kWh/a	770
Energy Efficiency Index (EEI)	37,06
Noise level, dB(A)	70
Refrigeration / freezing technique	Static
Climate class	7
Type of refrigerant / gas gr.	R290a / 110
Temperature range °C	-18 / -24
NoFrost	No

	Item number	23424310000IC510D	Taric goods code	8418501190
	EAN code	5704704019560	QTY in 40HQ	81

Installation and power	
Voltage / hertz, V/hz	230 / 50
Peak power watt, W	370
Watt / Ampere, W/A	245 / 2.5
Length of Powercord, cm	200

Short Description

Freezer function from -18°C to -24°C with Intelligent air circulation system, which ensures uniform ventilated cold distribution throughout the freezer. As a freezer display case, it is ideal for storing ice cream.

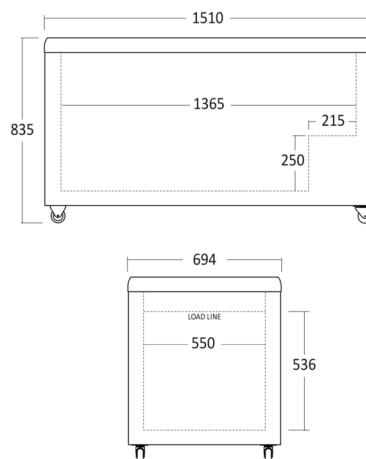4 strong wire baskets with 2 partitions in each are included.

The freezer has 4 wheels and is easy to move around, even if it is full. The design is top class with soft and round corners.
The ice cream freezer is supplied with flat transparent sliding lids with an integrated handle that keeps the cold extra.

Design and comfort	
Controller	Mechanical
Control panel	Outside
Digital display	No
Internal light	No light
External thermometer	Yes
Door- / lid type	Sliding
Handle	Integrated
Number of castors, pcs	4 casters (2 w/brake)
Lock & Key	Yes

Key features

- Flat sliding glass lids with lock
- 4 strong wire baskets including 2 dividers in each
- Coated white steel inner liner
- 4 strong castors
- Suitable for branding

Measurement Drawings

Colour and material	
Outside colour	White
Inside Colour	White
Colour and material of door/lid	Sliding glass

Features	
Number of baskets, pcs	6
Basket Size (HxWxD) (mm)	Yes
Max loading per shelf/basket, kg	20

scandomestic